


“SECURE” Means safe, Reliable and reflects the core value of the brand about “all for safe reach” throughout and constantly in the complete process of product R&D, manufacturing, sales and service.



**CUSTOMER'S SUCCESS IS OUR SUCCESS AND
WE ARE CONVINCED OUR COMPANY ONLY HAS
VALUE THROUGH CREATING CUSTOMER VALUE.**

SECURE ENGINEERING & ELEVATORS POINT integrates the industrialization and information technology deeply and creates an international intelligent factory according to industry standard.

SECURE ENGINEERING owns functional areas, including manufacturing center, R&D center, testing center, head office, sales office, warehouse.

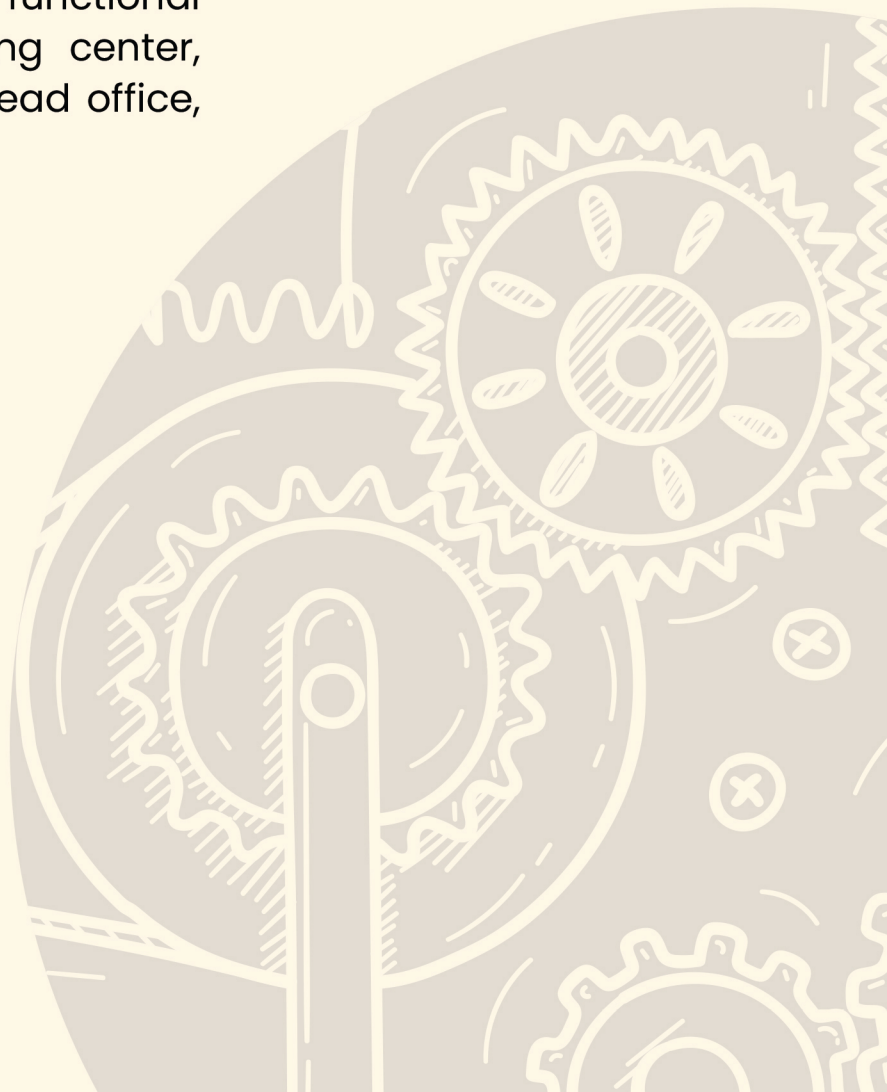



The company inherits management idea of creating world product, supplying superior service, as well as coordinating outstanding services with advanced technology to satisfy clients demands as first task, it explored innovation constantly, advances with huge amount of users to create future commonly.



ABOUT COMPANY

WE STRIVE TO PROVIDE OUR CLIENTS WITH PRODUCTS CONSISTENTLY GOOD IN QUALITY AND AT THE BEST PRICE TOO.

We use high graded lab tested raw materials to manufacture our product to ensure appropriate supply to customers across the globe We commit Ourselves to developing and manufacturing high-efficiency elevator traction machine

Our workshop

Combined with skilled technicians' strict Quality Control & Quality Management, our own Engineers and world-class machining tools bring a good guarantee of the quality and accuracy of our products.

SECURE ENGINEERING with a clear vision to become the most credible elevator traction machine & products manufacturing brand.

We are manufacturing products according to international standards,we strive to provide our clients with superior products consistently with lab tested certified graded high quality raw materials as per international norms.

The products are well integrated with excellent performance ,space saving, environmental protection and many more advantaged.

From heavy load capacity to normal capacity, from high speed to low speed, from high building to low building, from good to passenger, we not only provide standard products, but also can do customization to meet the requirements of various high end commercial, factory, residential etc building.

We persists in the development strategy of "internationalization, technology, industrialization" and takes the innovation of service, technology and idea as its core to realize a new value eco of intelligent manufacturing, industrial service and international brand further to spare no effort to become world excellent elevator product manufacturer.



MISSION & VISSION

VISION

TO BECOME THE MOST CREDIBLE ELEVATOR
TRACTION MACHINE & ELEVATOR PRODUCTS
MANUFACTURING BRAND



MISSION

CLIENTS SATISFACTION
EMPLOYEES HAPPINESS
CORPORATE VALUE
BETTER SOCIETY


YOKO 5SE

Max Static Load **3050kg**
Brake **DC 110V, 1.0 A**

Center [Inches]	Load [In KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [In MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
5"	408	0.65	40/1	530	3 X 10/13	1:1	3.75	5	6P	26
5"	408	0.1	50/1	530	3 X 10/13	1:1	4.5	6	6P	26
5"	408	0.3	40/1	300	3 X 10/13	1:1	3.75	5	6P	26
5"	408	0.56	40/1	300	3 X 10/13	1:1	3.75	5	6P	26
5"	544	0.65	40/1	530	3/4 X 10/13	1:1	5.5	7.5	6P	26
5"	544	1	40/1	530	3/4 X 13/10	1:1	5.5	7.5	6P	26
5"	1000	0.25	50/1	530	4 X 10/13	2:1	5.5	7.5	6P	26

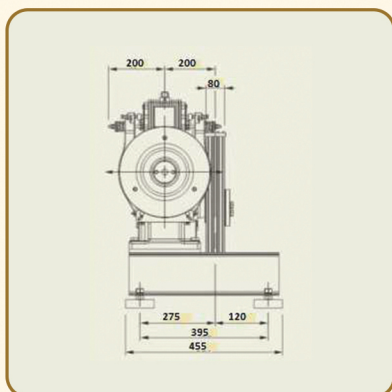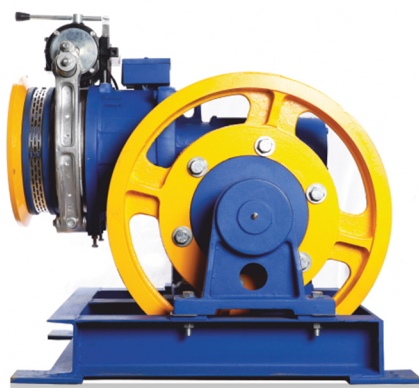

(All Dimensions are mm)

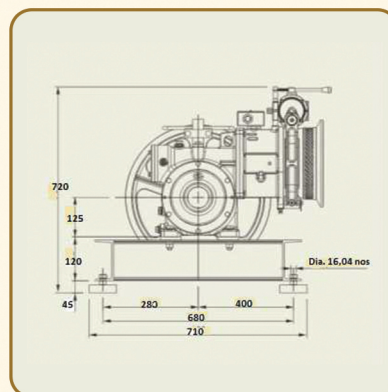



(All Dimensions are mm)

Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves


YOKO 6SE

Max Static Load **4500kg**
Brake **DC 110V, 1.0 A**

Center [Inches]	Load [in KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [in MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
6"	544	0.65	40/1	530	3 X 13/10	1:1	5.5	7.5	6P	30
6"	680	0.65	40/1	530	3 X 13/10	1:1	7.5	10	6P	30
6"	1500	0.25	50/1	530	4 X 13	2:1	7.5	10	6P	30
6"	1000	0.32	40/1	530	4 X 13	2:1	5.5	7.5	6P	25
6"	1000	0.50	50/1	530	4 X 13	2:1	7.5	10	6P	25

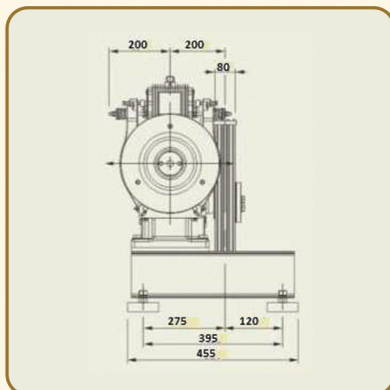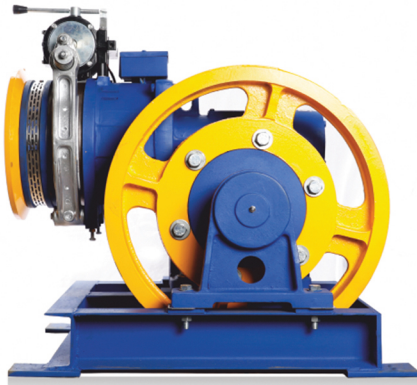

(All Dimensions are mm)

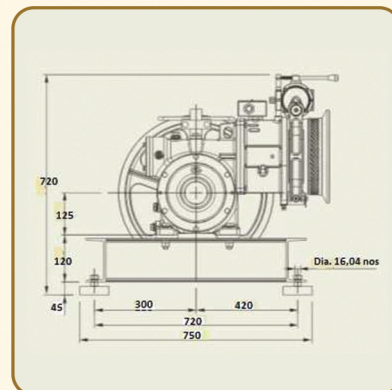



(All Dimensions are mm)

Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves


YOKO 7SE

Max Static Load **6500kg**
Brake **DC 110V, 1.0 A**

Center [Inches]	Load [In KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [In MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
7"	884	0.65	80/2	530	4 X 13	1 : 1	9	12	6P	50
7"	1000	0.65	80/2	530	4 X 13	1 : 1	9	12	6P	50
7"	2000	0.32	80/2	530	4 X 13/16	2 : 1	9	12	6P	20
7"	1020	0.65	80/2	530	4 X 13	1 : 1	11	15	6P	50

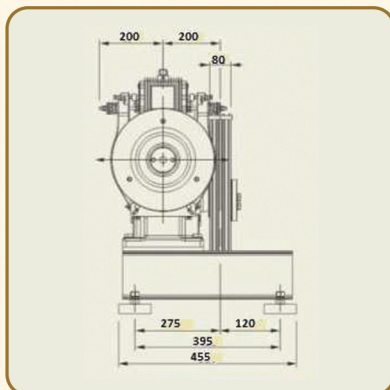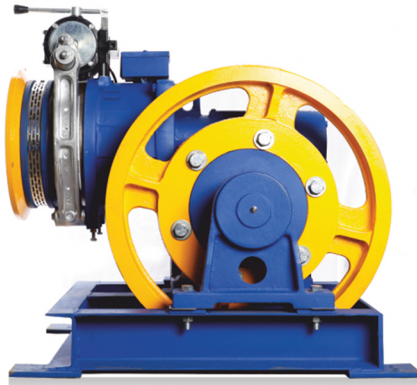

(All Dimensions are mm)

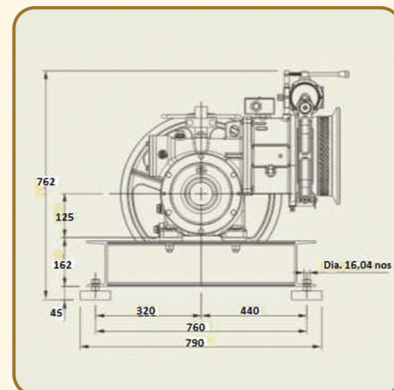



(All Dimensions are mm)

Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves


YOKO 8SE

Max Static Load **7800kg**
 Brake **DC 110V, 1.0 A**

Center [Inches]	Load [in KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [in MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
8"	1500	0.65	80/2	530	5 X 13	1 : 1	13	17.5	6P	50
8"	2500	0.30	50/1	610	5 X 13	2 : 1	11	15	6P	30
8"	2000	0.30	50/1	610	4 X 13	2 : 1	9	12	6P	30
8"	2000	0.50	53/2	530	5 X 13	2 : 1	11	15	6P	30

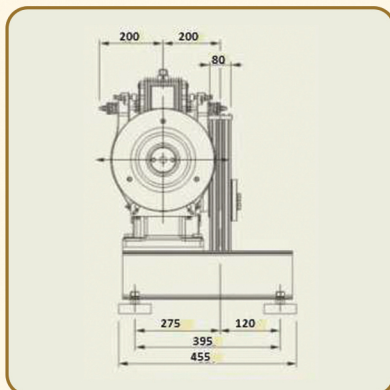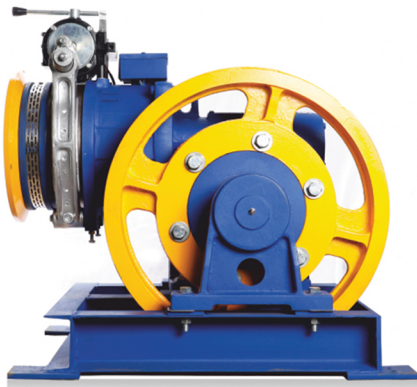

(All Dimensions are mm)

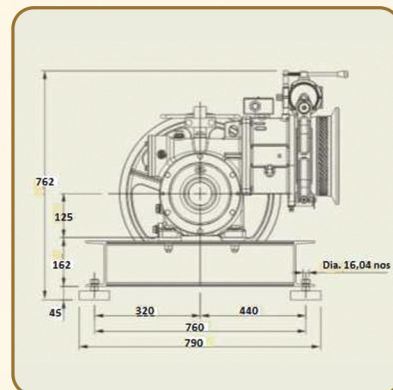



(All Dimensions are mm)

Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves


YOKO 9SE

Max Static Load **8500kg**
Brake **DC 110V, 1.0 A**

Center [Inches]	Load [In KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [In MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
9"	1750	1	60/2	610	5 X 13	1 : 1	18.75	25	6P	70
9"	2500	0.30	50/1	610	5 X 13	2 : 1	11	15	6P	30
9"	3000	0.30	50/1	610	5 X 13	2 : 1	15	20	6P	36

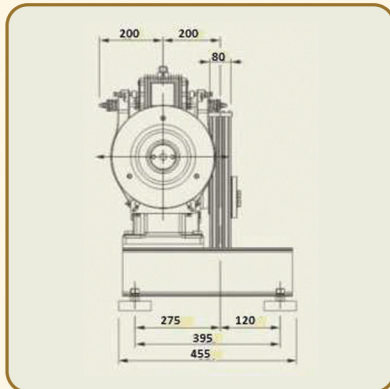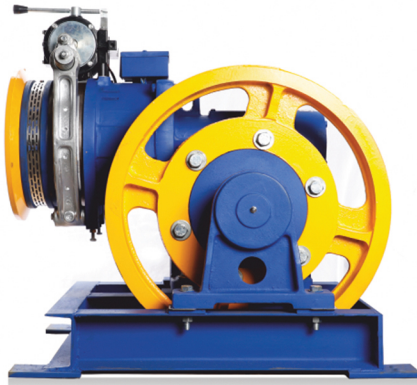

(All Dimensions are mm)

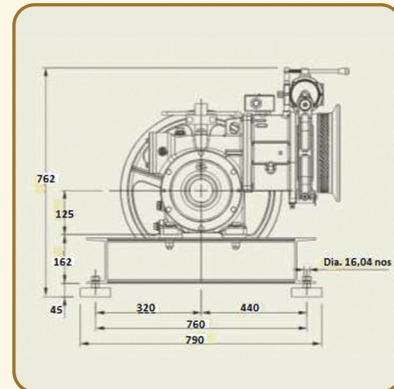

(All Dimensions are mm)

Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves



Loading capacity 50 kg to 5 ton

Drum Dia 220 | 245 | 306 | 406 mm


Roping 1:1 | 2:1 | 4:1

Rope Size groove in Drum 8 | 10 | 13 | 16 mm

Speed 0.45 | 0.25 | 0.15 m/sec

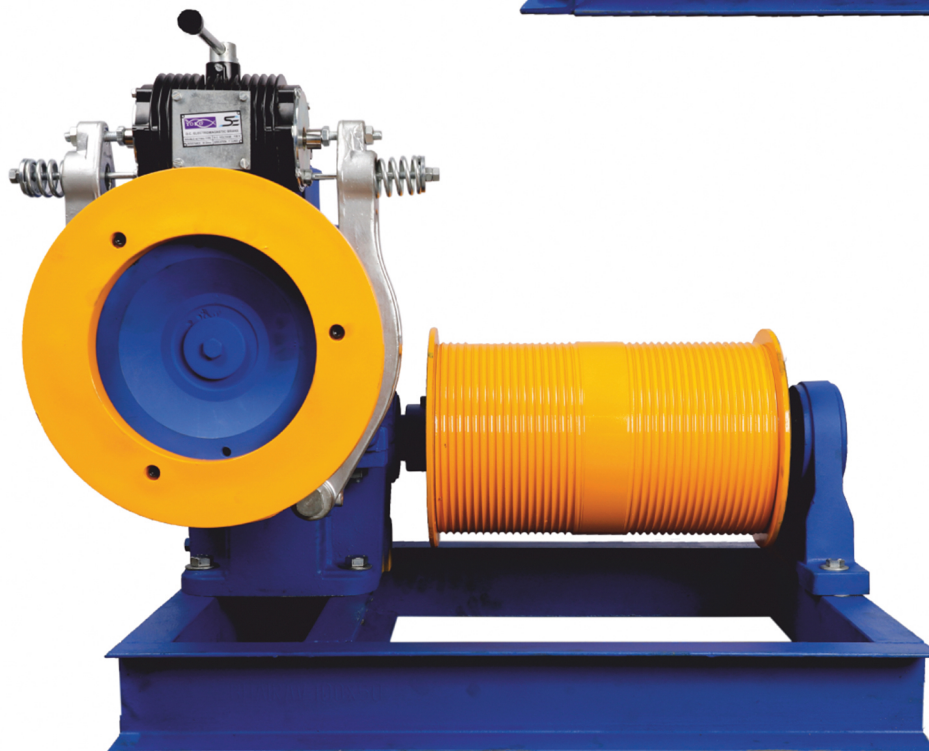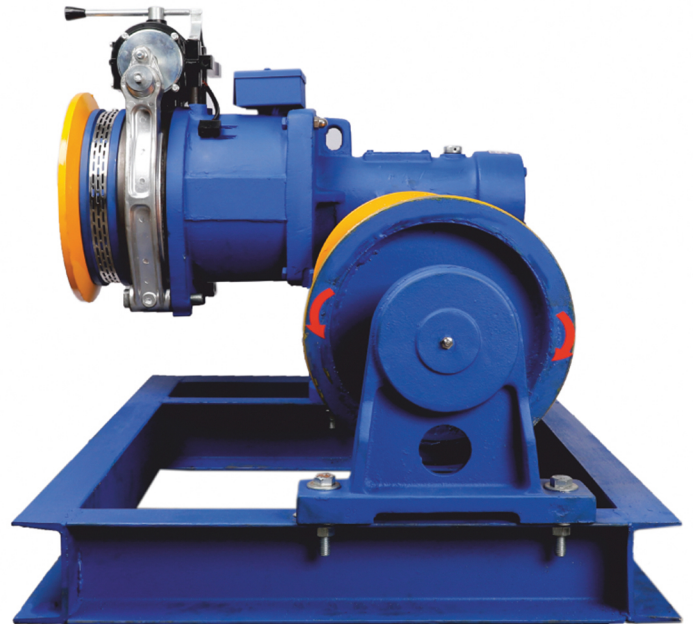


Guide Shoe

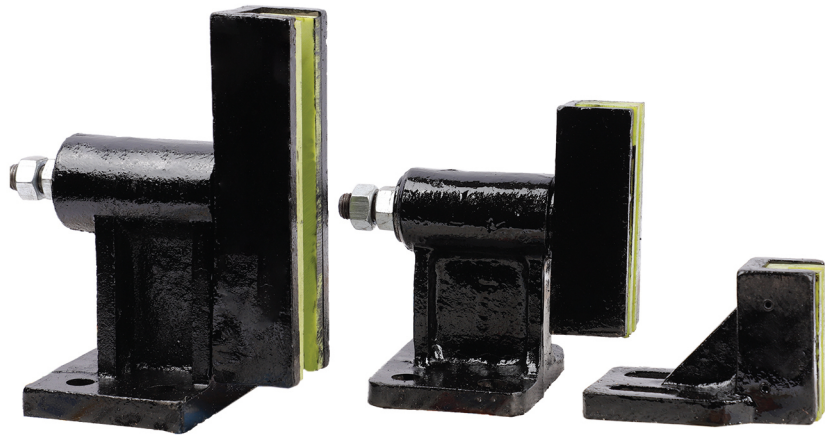

**Car & Counter
Guide Shoe**

Guide Shoe Liner

5mm, 6mm, 9mm, 10mm & 16mm, Guide liner

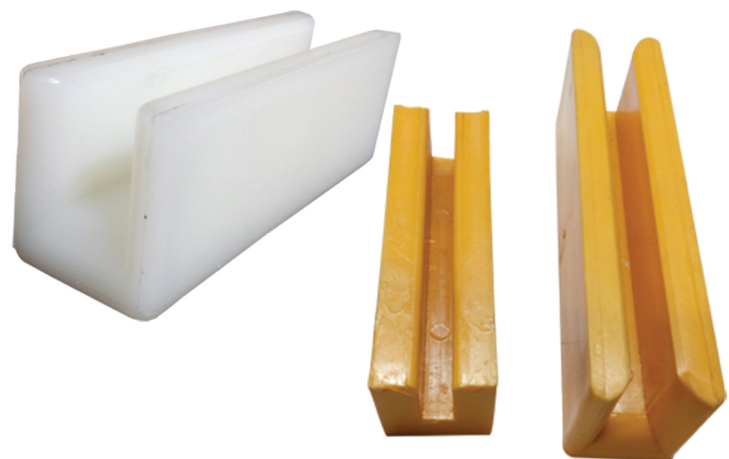

Safety Block



Safety Gear SE


Safety Gear
SE Excel




Divertor sheave



- Available Sheave Dia 200mm, 300mm, 320mm, 400mm, 530mm
- Available Shaft Dia 50mm, 60mm
- We can make all this diverter sheave for 6mm, 8mm, 10mm, 13mm and 16mm wire rope.
- Diverter Sheave available in Bearing type and bush type.

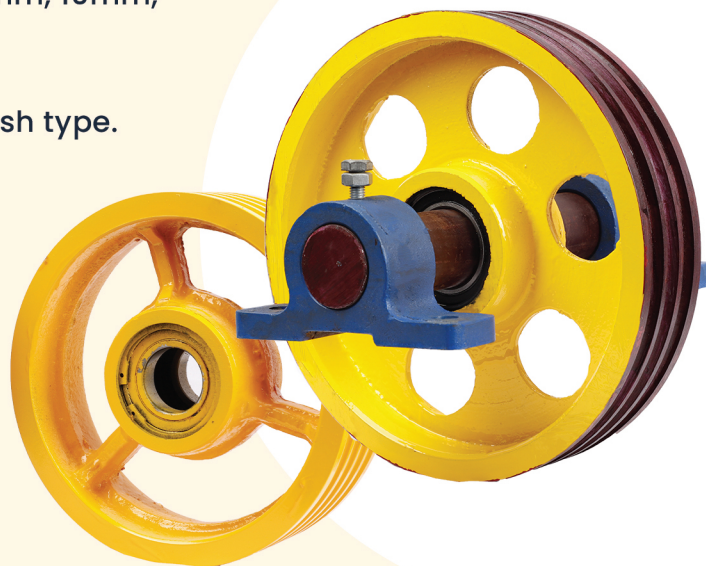

Overspeed Governor

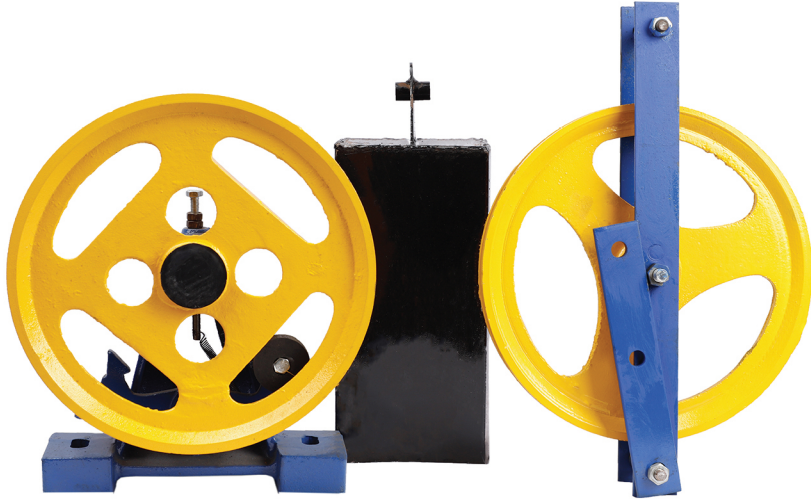

Type 1: 300 Dia

Type 2: 200 Dia
(240)



Type 3: SEG
(200)

Rope Socket / Eye bolt / Thimble

