



“SECURE” Means safe, Reliable and reflects the core value of the brand about “all for safe reach” throughout and constantly in the complete process of product R&D, manufacturing, sales and service.



As a trusted partner in the elevator industry, we specialize in manufacturing high-performance spare parts designed to meet the demands of B2B clients worldwide. With a focus on quality, reliability, and rapid delivery, we combine advanced technology with a commitment to service that keeps your operations running smoothly. Whether you're an OEM, distributor, or service provider, we're here to help you elevate your business with dependable solutions and long-term value.



ABOUT COMPANY

AT REEVA INTERNATIONAL, WE SPECIALIZE IN THE PRODUCTION AND GLOBAL DISTRIBUTION OF HIGH-QUALITY ELEVATOR COMPONENTS, DESIGNED TO MEET THE STRINGENT DEMANDS OF MODERN VERTICAL TRANSPORTATION SYSTEMS.

We use high graded lab tested raw materials to manufacture our product to ensure appropriate supply to customers across the globe. We commit ourselves to developing and manufacturing high-efficiency elevator traction machine.

Our workshop

Backed by skilled technicians, strict quality control, and expert engineering, our use of world-class machining tools ensures exceptional precision and reliability in every product we deliver.

Our products are manufactured in compliance with international standards, using lab-tested, certified, and high-grade raw materials to ensure consistent quality. Designed for superior performance, they offer advantages such as space efficiency, environmental sustainability, and seamless integration—making them a reliable choice for modern elevator systems.

From heavy-duty to standard capacity, high-speed to low-speed systems, and from high-rise to low-rise buildings—whether for freight or passenger use—we offer both standard and customizable elevator spare parts to meet the diverse needs of commercial, industrial, and residential projects.

We are driven by a development strategy focused on internationalization, technological advancement, and industrial growth. By emphasizing innovation in service, engineering, and business philosophy, we aim to build a smart, value-driven ecosystem that blends intelligent manufacturing with global brand excellence. Our ultimate goal is to become a world-class manufacturer of elevator components, delivering uncompromising quality and long-term value to our clients worldwide.

MISSION & VISSION

MISSION


AT REEVA INTERNATIONAL, OUR MISSION IS TO DELIVER EXCEPTIONAL PRODUCTS AND STRATEGIC BUSINESS SERVICES THAT ENABLE OUR CLIENTS TO SUCCEED IN A COMPETITIVE GLOBAL MARKETPLACE — WITH A FOCUS ON QUALITY, INNOVATION, AND LONG-TERM VALUE.

VISION


As a trusted partner in global trade and business solutions, we aim to scale globally and set new standards in industrial supply and business services — driven by technology, transparency, and a commitment to long-term value creation.

YOKO 5SE

Center [Inches]	Load [In KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [In MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
5"	408	0.65	40/1	530	3 X 10/13	1:1	3.75	5	6P	26
5"	408	0.1	50/1	530	3 X 10/13	1:1	4.5	6	6P	26
5"	408	0.3	40/1	300	3 X 10/13	1:1	3.75	5	6P	26
5"	408	0.56	40/1	300	3 X 10/13	1:1	3.75	5	6P	26
5"	544	0.65	40/1	530	3/4 X 10/13	1:1	5.5	7.5	6P	26
5"	544	1	40/1	530	3/4 X 13/10	1:1	5.5	7.5	6P	26
5"	1000	0.25	50/1	530	4 X 10/13	2:1	5.5	7.5	6P	26

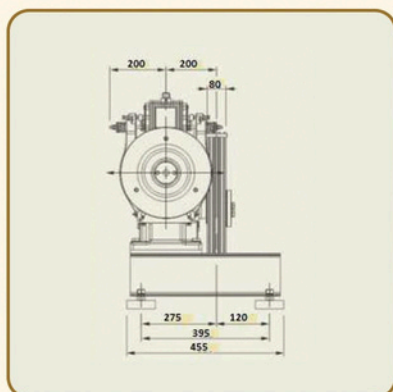

(All Dimensions are mm)

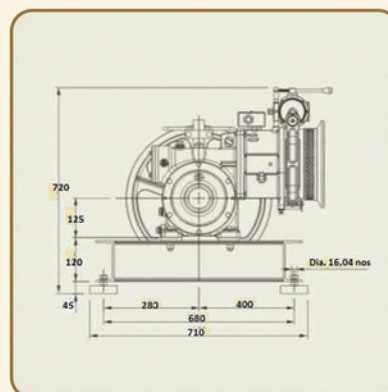


(All Dimensions are mm)


Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves

YOKO 6SE

Center [Inches]	Load [in KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [in MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
6"	544	0.65	40/1	530	3 X 13/10	1:1	5.5	7.5	6P	30
6"	680	0.65	40/1	530	3 X 13/10	1:1	7.5	10	6P	30
6"	1500	0.25	50/1	530	4 X 13	2:1	7.5	10	6P	30
6"	1000	0.32	40/1	530	4 X 13	2:1	5.5	7.5	6P	25
6"	1000	0.50	50/1	530	4 X 13	2:1	7.5	10	6P	25

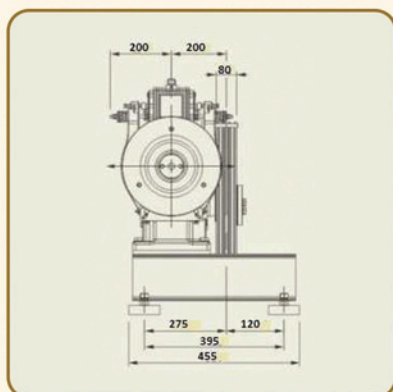

(All Dimensions are mm)

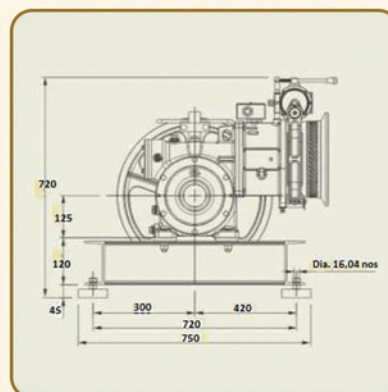


(All Dimensions are mm)


Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves

YOKO 7SE

Center [Inches]	Load [In KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [In MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
7"	884	0.65	80/2	530	4 X 13	1:1	9	12	6P	50
7"	1000	0.65	80/2	530	4 X 13	1:1	9	12	6P	50
7"	2000	0.32	80/2	530	4 X 13/16	2:1	9	12	6P	20
7"	1020	0.65	80/2	530	4 X 13	1:1	11	15	6P	50

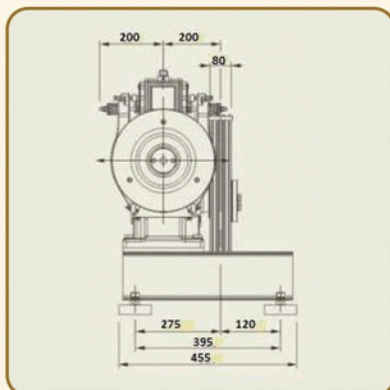

(All Dimensions are mm)

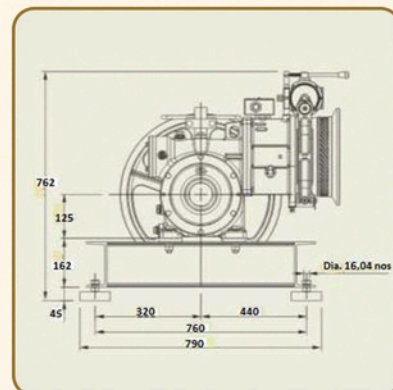


(All Dimensions are mm)


Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves

YOKO 8SE

Center [Inches]	Load [in KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [in MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
8"	1500	0.65	80/2	530	5 X 13	1 : 1	13	17.5	6P	50
8"	2500	0.30	50/1	610	5 X 13	2 : 1	11	15	6P	30
8"	2000	0.30	50/1	610	4 X 13	2 : 1	9	12	6P	30
8"	2000	0.50	53/2	530	5 X 13	2 : 1	11	15	6P	30

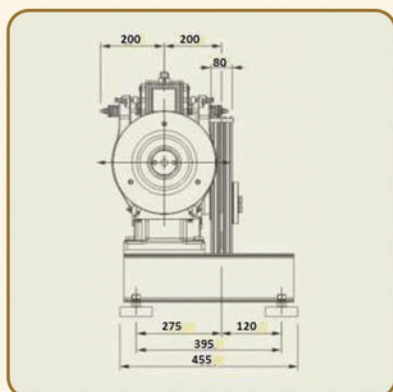



(All Dimensions are mm)

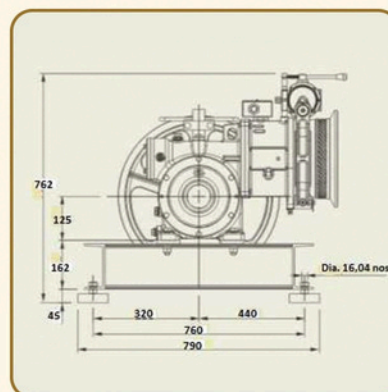


(All Dimensions are mm)

Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves

Center [Inches]	Load [In KG]	Speed [M/Sec]	Gear [Ratio]	Sheave [In MM]	Rope [MM] [Pitch 19 MM]	Ropping	Power [KM]	Power [HP]	Pole	Travel [Height Mtrs]
9"	1750	1	60/2	610	5 X 13	1:1	18.75	25	6P	70
9"	2500	0.30	50/1	610	5 X 13	2:1	11	15	6P	30
9"	3000	0.30	50/1	610	5 X 13	2:1	15	20	6P	36

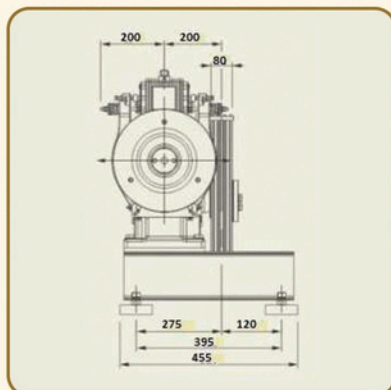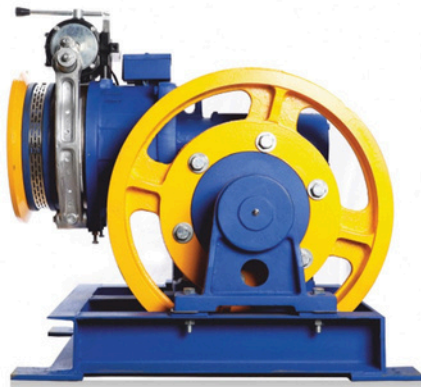

(All Dimensions are mm)

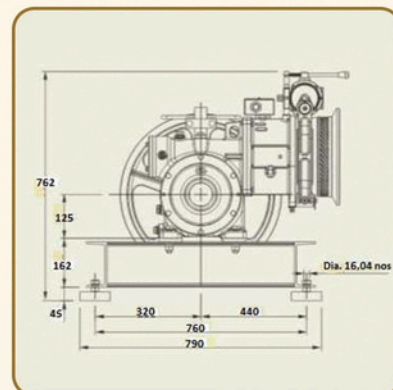

(All Dimensions are mm)

Note: Main sheave 530/560/610 available in Rope Size 8mm/10mm/13mm in 3/4/5 grooves


Loading capacity 50 kg to 5 ton


Drum Dia 220 | 245 | 306 | 406 mm

Roping 1:1 | 2:1 | 4:1

Rope Size groove in Drum 8 | 10 | 13 | 16 mm

Speed 0.45 | 0.25 | 0.15 m/sec

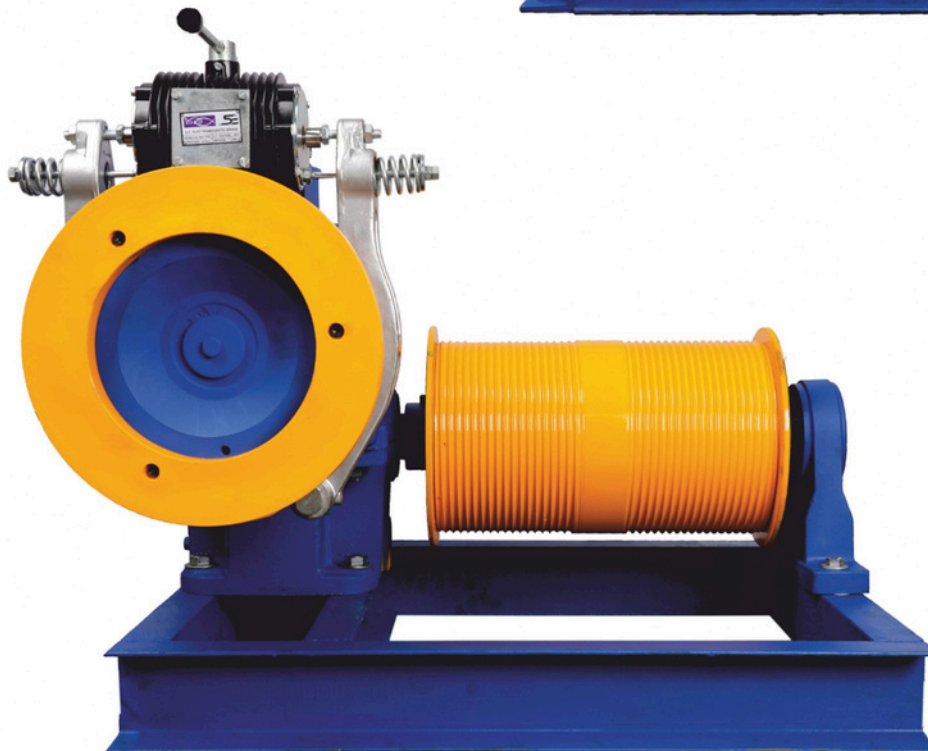


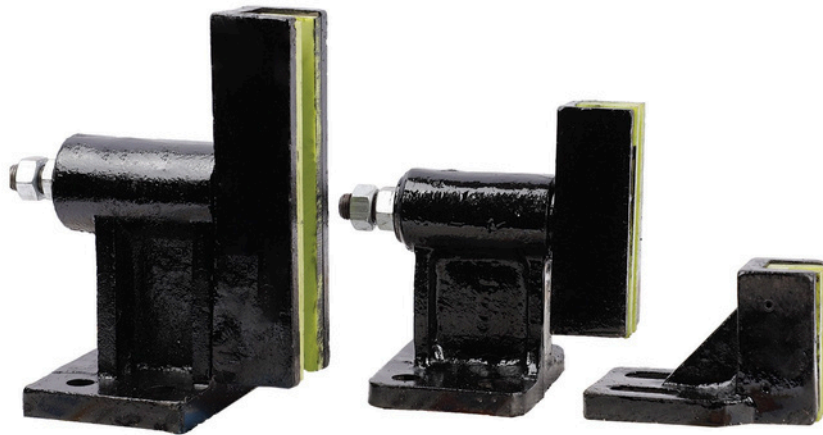


**Car & Counter
Guide Shoe**

Guide Shoe Liner

5mm, 6mm, 9mm, 10mm & 16mm, Guide liner

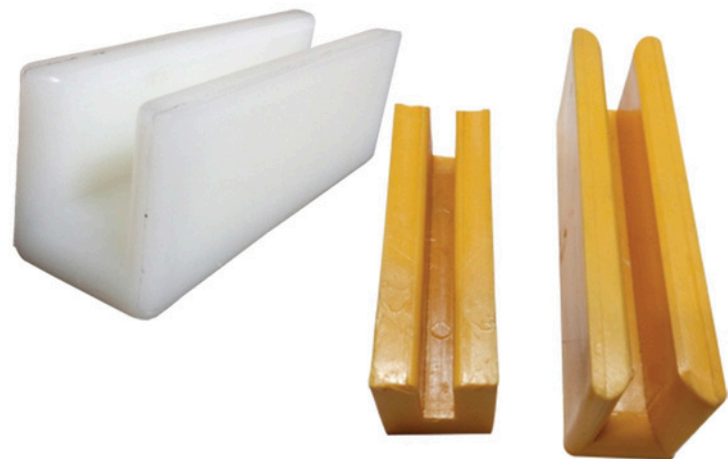

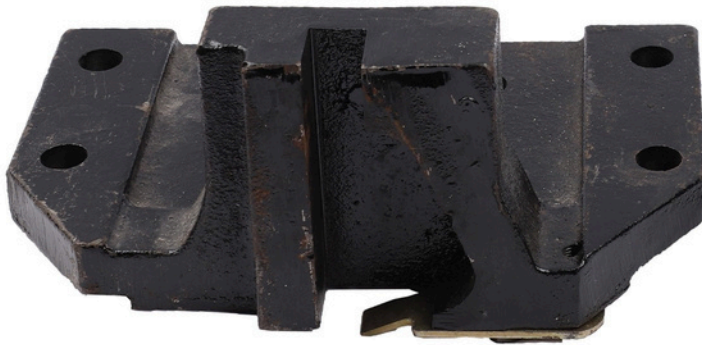


Safety Gear SE


**Safety Gear
SE Excel**





- Available Sheave Dia 200mm, 300mm, 320mm, 400mm, 530mm
- Available Shaft Dia 50mm, 60mm
- We can make all this diverter sheave for 6mm,8mm, 10mm, 13mm and 16mm wire rope.
- Diverter Sheave available in Bearing type and bush type.

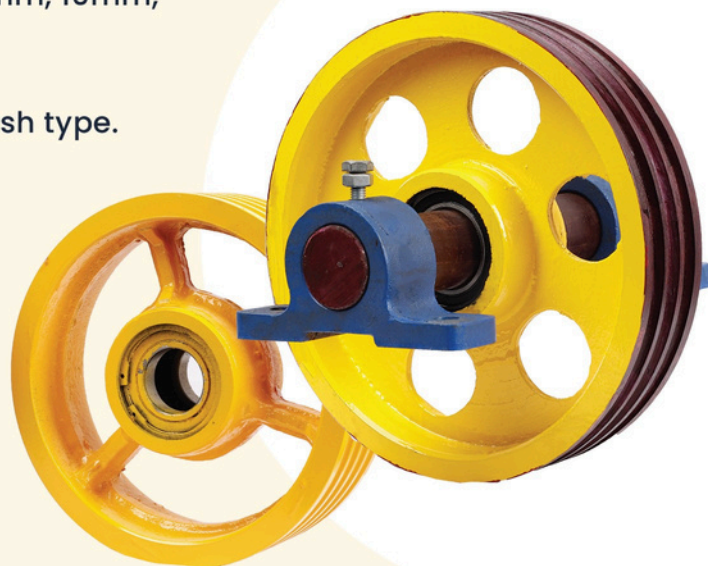

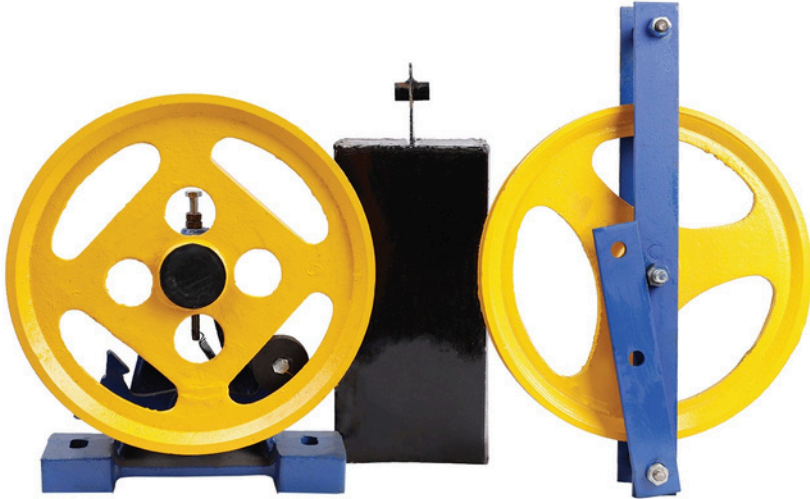

Type 1: 300 Dia

Type 2: 200 Dia
(240)




Type 3: SEG
(200)



Contact Us

 **marketing@reeva.international**

 **www.reeva.international**

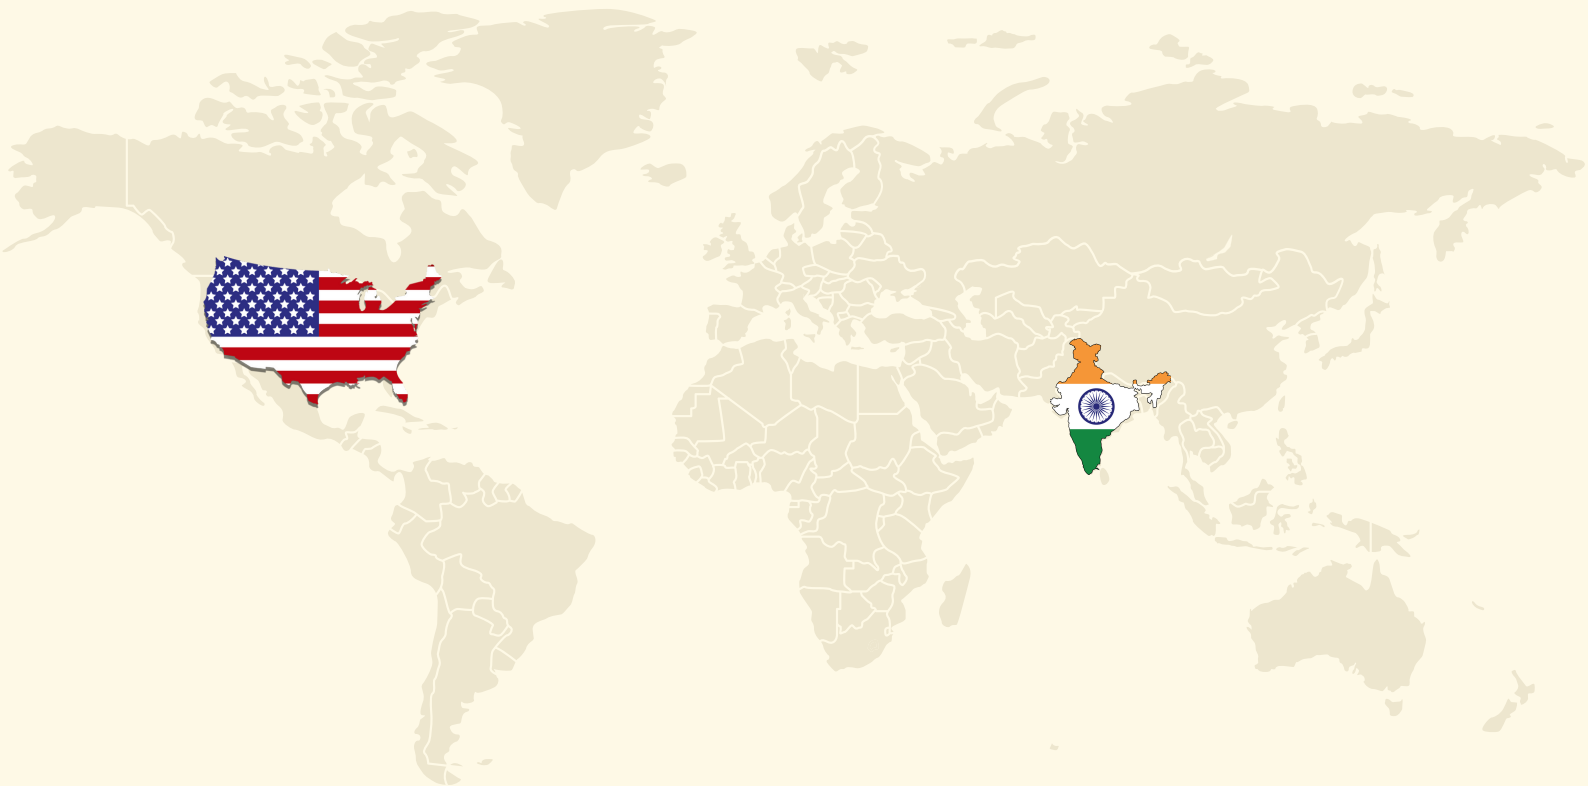

USA OFFICE

 **706 Still Oak trail, Fort Mill, SC 29708**

 **+1 352-358-5454**

INDIA OFFICE

 **1303, 13th Floor, Shivalik Shilp, Ahmedabad**

 **+91 9898626627**